

GENERAL

ALIACOM AHT520 Series HART communicator is a PC communication link to HART networks for commissioning, servicing, calibrating, or acquiring data from any hart modem or transmitter. The AHT520 is a user friendly interface that enables you to set and check instrument parameters such as tag numbers and ranges, outputs, and data review.

FEATURES


- ❑ Compatible with HART products from multiple manufacturers
- ❑ No external power supply required, USB powered from notebook/PC
- ❑ Compact size 2.9" x 2.5" x 0.85" (73mm x 64mm x 22mm)
- ❑ Rugged Aluminum Alloy enclosure
- ❑ Polarity insensitive so you may attach either one of the test clips to positive or negative poles
- ❑ Standard USB port
- ❑ USB 1.1 and 2.0 compatible
- ❑ Hart communicator programming software included



STANDARD SPECIFICATION

- Power supply : System Power by USB Port
- Supply Current : 40 mA @ +5VDC
- Output Level : 0.5 +/- 0.1 Vpp trapezoidal wave
- Isolation : 1500 VDC between instrument and Computer
- Leakage Current : Less than 200 uA Typical
- EMI/RFI Effect : Follow SAMA PMC 33.1 from 20 to 1000 MHz and for field strengths up to 30 V/m
- Protection Class : IP54
- USB Interface : USB 1.1 and USB 2.0
- Port to Hart Device : Two Mini-Grabber test clips
Length : 1.0 M
- Port to Computer : USB connector
Length : 1.5 M
- Operating Temp. : 32 °F to 131 °F (0 °C to 55 °C)
- Storage Temp. : -40 °F to 185 °F (-40 °C to 85 °C)
- Storage Humidity : 0% to 98% relative humidity
- Enclosure : Aluminum alloy housing with impact-resistant performance
- System Requirements :
 - Operating System : Windows 98 / 2000 / XP / Win7
 - Display : 800x600 or better resolution
 - Hard Disk Drive : 1GB space or more
 - Main Memory : 256Mb or more
 - Function : Parameter Manager
: DTM works
- Parameter Storage : Saved as TXT files
- Dimensions : 73mm(L) X 64mm(W) X 24mm(H)
: 2.9"(L) x 2.5"(W) x 0.85"(H)
- CE Mark : AHT520 meets standard requirements of the EC directives
- Weight : 0.33 lb (0.15 Kg)
- Standard package Includes :
 - : ATH520 Hart Communicator * 1 set
 - : Mini-Grabber test clip (1.0M) * 1 pair
 - : USB connector(1.5M) * 1 set
 - : CD Rom (DTM & Driver inside) * 1set

DIMENSIONS

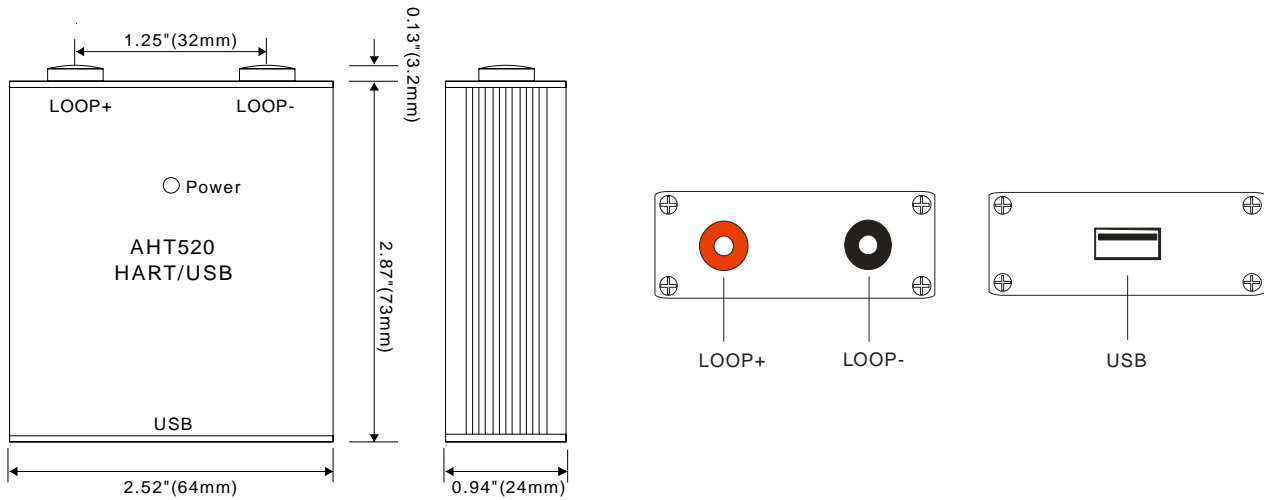

APPLICATIONS

